




WHITE




IVORY




LINEN

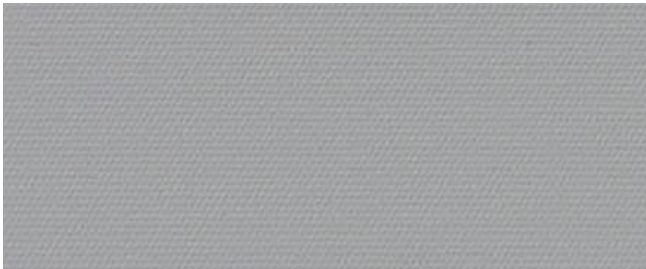

LIGHT GREY

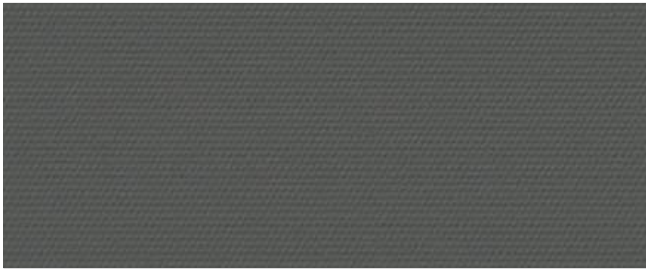

SLATE

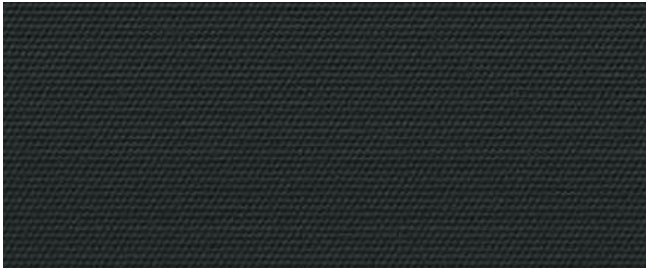

ECLIPSE

SPECIFICATION

ASENZA BLACKOUT

|                      |                                               |                  |                               |
|----------------------|-----------------------------------------------|------------------|-------------------------------|
| Composition          | 100% Polyester with Acrylic foam back coating | Fabric Weight    | 12.09 oz/sqyd (410 gsm) +/-5% |
| Standard Roll Length | 30 yds (28m)                                  | Fabric Thickness | 0.017" (0.45mm) +/-5%         |
| Fabric Width         | 98.4"(250cm), 118"(300cm)                     | Acoustic         | NRC 0.00 SAA 0.03             |

|     |            | TS | RS | AS | TV | RV | AV | TUV | 1/8"CL | SC Single Glass<br>1/4"CL | 1/4"HA | 1/2"CL | SC Insulating Glass<br>1"CL | 1"HA |
|-----|------------|----|----|----|----|----|----|-----|--------|---------------------------|--------|--------|-----------------------------|------|
| 100 | White      | 0  | 66 | 34 | 0  | 77 | 23 | 0   | 0.29   | 0.30                      | 0.30   | 0.28   | 0.29                        | 0.24 |
| 101 | Ivory      | 0  | 68 | 32 | 0  | 79 | 21 | 0   | 0.28   | 0.28                      | 0.29   | 0.27   | 0.28                        | 0.23 |
| 102 | Linen      | 0  | 67 | 33 | 0  | 78 | 22 | 0   | 0.28   | 0.29                      | 0.29   | 0.28   | 0.29                        | 0.23 |
| 103 | Light Grey | 0  | 66 | 34 | 0  | 77 | 23 | 0   | 0.29   | 0.30                      | 0.30   | 0.28   | 0.29                        | 0.24 |
| 104 | Slate      | 0  | 70 | 30 | 0  | 80 | 20 | 0   | 0.26   | 0.27                      | 0.28   | 0.26   | 0.27                        | 0.23 |
| 105 | Eclipse    | 0  | 68 | 32 | 0  | 79 | 21 | 0   | 0.28   | 0.28                      | 0.29   | 0.27   | 0.28                        | 0.23 |

TS = Solar Transmittance  
RS = Solar Reflectance

AS = Solar Absorptance  
TV = Visual Transmittance

1/8" CL = 1/8" Clear Glass  
1/4" CL = 1/4" Clear Glass

1/4" HA = 1/4" Heat Absorbing Glass  
\*SIDE: FRONT (BACK)

Fire Classifications  
NFPA701-2019 TM#1

Rail Road  
Not Recommended

Colar Fastness to Light  
Grade ≥ 6, ISO 105-B02:2014 Method 3

Fabrication Methods  
Cutting: Cold, Ultrasonic, Crush or Laser Cut  
Welding: Thermal, High-Frequency, or sewing

Acoustical Performance  
ASTM C423

Environmental  
GreenGuard, GreenGuard Gold, RoHS-Lead Free

Care & Cleaning  
Dust removal with vacuum, compressed air or soft brushing.  
Do not scrub. Wipe clean with sponge using clean water.

