
TERRA

LF / PR / BO

TERRA LIGHT FILTERING

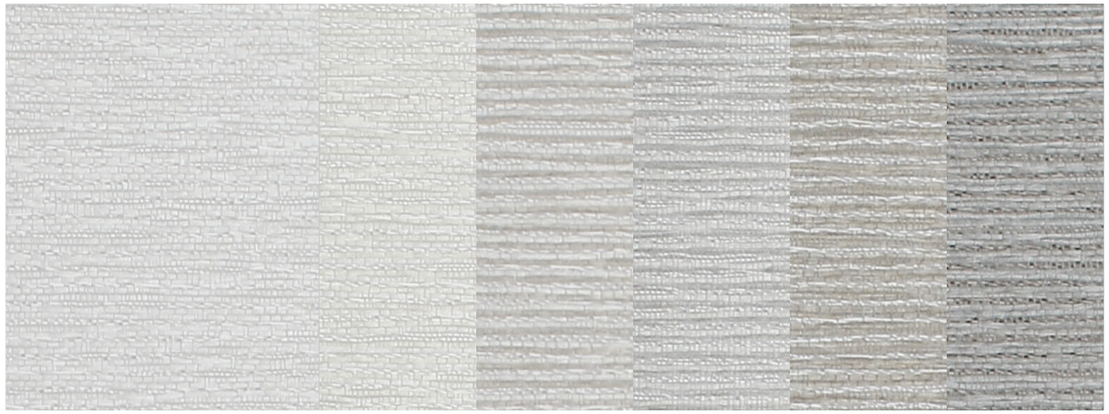


Snow Ivory Sand Silver Copper Granite

TERRA PRIVACY



Snow Ivory Sand Silver Copper Granite

TERRA BLACKOUT

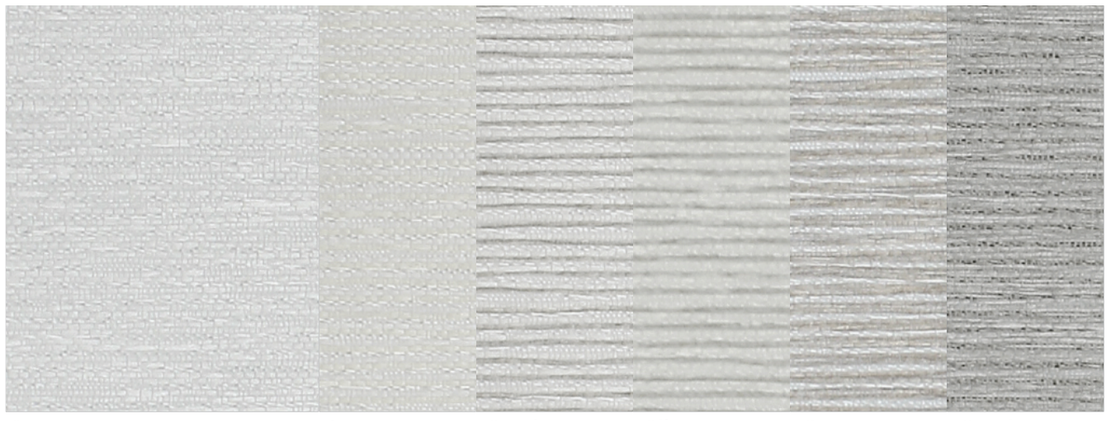

Snow Ivory Sand Silver Copper Granite

SPECIFICATION

Composition
100% Polyester (Light Filtering, Privacy),
100% Polyester with Acrylic Foam Coating (BO)

Standard Roll Length
30 lyds (27 m)

Width
118"(3.0 m)

	LF LIGHT FILTERING	PR PRIVACY	BO BLACK OUT
Opaqueness	Light Filtering	Privacy	Blackout
Weight +/-5%	5.69 oz/yd² (193g/m²)	6.87 oz/yd² (233g/m²)	12.42 oz/yd² (421g/m²)
Thickness +/-5%	0.018"(0.48mm)	0.019" (0.49mm)	0.025" (0.63mm)
Acoustic ASTM C423	NRC 0.00 SAA 0.01	NRC 0.00 SAA 0.02	NRC 0.00 SAA 0.02

						SC Single Glass			SC Insulating Glass		
			TS	RS	AS	TV	1/8"CL	1/4"CL	1/4"HA	1/2"CL	1"CL	1"HA
LF	110	SNOW	45	52	3	46	0.51	0.49	0.41	0.46	0.44	0.32
	111	IVORY	45	51	4	45	0.52	0.5	0.41	0.47	0.44	0.32
	112	SAND	41	45	14	41	0.55	0.53	0.42	0.5	0.47	0.34
	113	SILVER	40	47	13	40	0.53	0.51	0.42	0.49	0.46	0.33
	114	COPPER	36	40	24	35	0.57	0.55	0.43	0.52	0.49	0.35
	115	GRANITE	29	35	36	26	0.59	0.59	0.44	0.54	0.5	0.36
PR	110	SNOW	41	52	7	43	0.5	0.48	0.4	0.45	0.43	0.32
	111	IVORY	41	53	6	42	0.49	0.48	0.4	0.45	0.43	0.32
	112	SAND	35	48	17	35	0.51	0.49	0.41	0.47	0.44	0.32
	113	SILVER	35	48	17	35	0.51	0.49	0.41	0.47	0.44	0.32
	114	COPPER	31	42	27	30	0.54	0.52	0.42	0.5	0.47	0.34
	115	GRANITE	26	33	41	23	0.6	0.57	0.44	0.55	0.51	0.36
BO	110	SNOW	0	74	26	0	0.23	0.24	0.27	0.23	0.25	0.21

TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance
1/8" CL = 1/8" Clear Glass
1/4" CL = 1/4" Clear Glass
1/4" HA = 1/4" Heat Absorbing Glass

Fire Classifications
AVAILABLE UPON REQUEST

Environmental
GreenGuard, GreenGuard Gold, RoHs-Lead Free

Color Fastness to Light
Above Grade 8 (ISO 105-B02: 2014, Methond 3)

Fabrication Methods
Cutting: Cold or Ultrasonic cutting
Welding: Tape recommended. Test first to determine desired result
Railroding: Railroading this fabric is not recommended.

Acoustical Performance
ASTM C423

Care & Cleaning
Light vacuum cleaning or dusting. Prior to using a cleaning agent, it is highly recommended to test first in an inconspicuous area.

• ENERGY SAVING • • PRINTABLE • • LEAD FREE • • NOISE REDUCTION •